


NAVITRON SYSTEMS LTD

NT1000 EPR Inclinerometer

Designed and developed by Navitron Systems Ltd. to meet the requirements of MSC. 363(92) the NT1000 Electronic Pitch & Roll (EPR) Inclinerometer is a robust and accurate instrument which is fully compliant with IMO recommendations to all Governments that Inclinerometers not inferior to this specification should be installed to SOLAS vessels with effect from 1st July 2015.

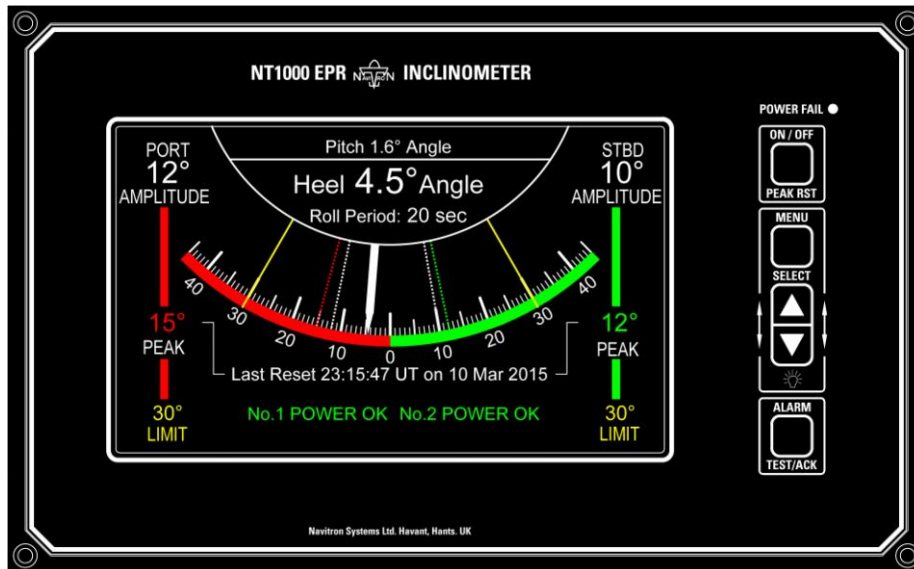

[The traditional mechanical "pendulum" type of heel measuring devices can provide reasonably accurate indications of angle, but this is largely confined to static situations whereas in a seaway, pendulum mass and inertia will invariably result in significant errors.


In addition to the mechanical limitations, further constraints include the inability to communicate with VDRs and BAMS (Bridge Alert Management Systems) etc.

Finally, the mechanical pendulum offers no simple solution for alerting watch personnel to the development of potentially dangerous situations geared to instability based on increasingly adverse heel angles and roll periods.]

NT1000 EPR Inclinerometer

Dims 252mm x 156mm x 104mm (depth)

Accordingly, the NT1000 EPR is fully Type Approved by Germanischer Lloyd (DNV GL) and may be installed with single or multiple colour display unit(s) to provide real time Pitch and Roll monitors for watch personnel in addition to recorded graphical displays or roll behavior over the last 3 minute and 30 minute periods.

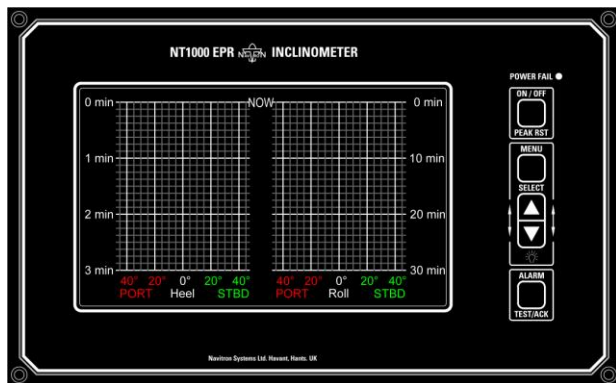


Serial Data input/output facilities enable the NT1000 EPR Inclinerometer to send data to VDR and to communicate bi-directionally with BAMS etc.

Operator adjustable alarm levels are available via the simple to use Set Up Menu and the Heel Limit Alarm can be visually and / or audibly signalled to remote locations (Masters Cabin etc.) by volt free contacts provided within a Navitron Junction Box.

Other Set Up Parameters include Time (UT) Date and Sensor Calibration.

The Inclinerometer System operates on 24Vdc supplies (Main and Back Up) and, whether installed as a single (Master) or multi display head configuration (3 x Slave heads maximum) all interconnecting cables are supplied in 3m lengths with factory fitted plugs for simple connection to the Display Unit sockets.

The Sensor Unit is a sealed, factory calibrated unit fitted with 3m of cable for connection to the Display Unit(s) via a 2 Entry Junction Box also supplied.

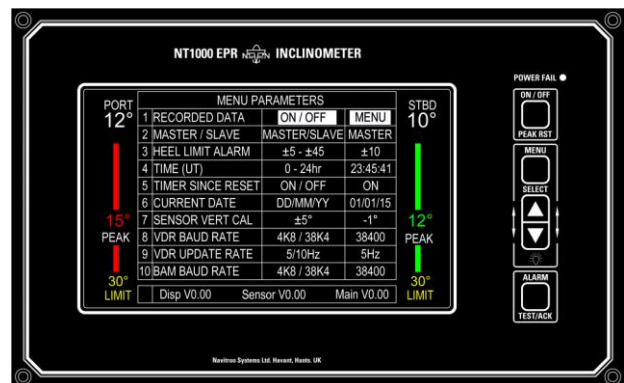



All Inclinerometer Units are simple to mount with all display heads identical and supplied ready for foot bracket or panel mounting as required.



NAVITRON SYSTEMS LTD (Registered in England No. 2607869)
 17 The Tanneries, Brockhampton Lane, Havant, Hampshire PO9 1JB
 TEL: (UK) 023 9249 8740 FAX: (UK) 023 9249 8783
 (INT) +44 23 9249 8740 (INT) +44 23 9249 8783
 E-mail: sales@navitron.co.uk Web: www.navitron.co.uk

NAVITRON SYSTEMS LTD

NT1000 EPR Inclinator

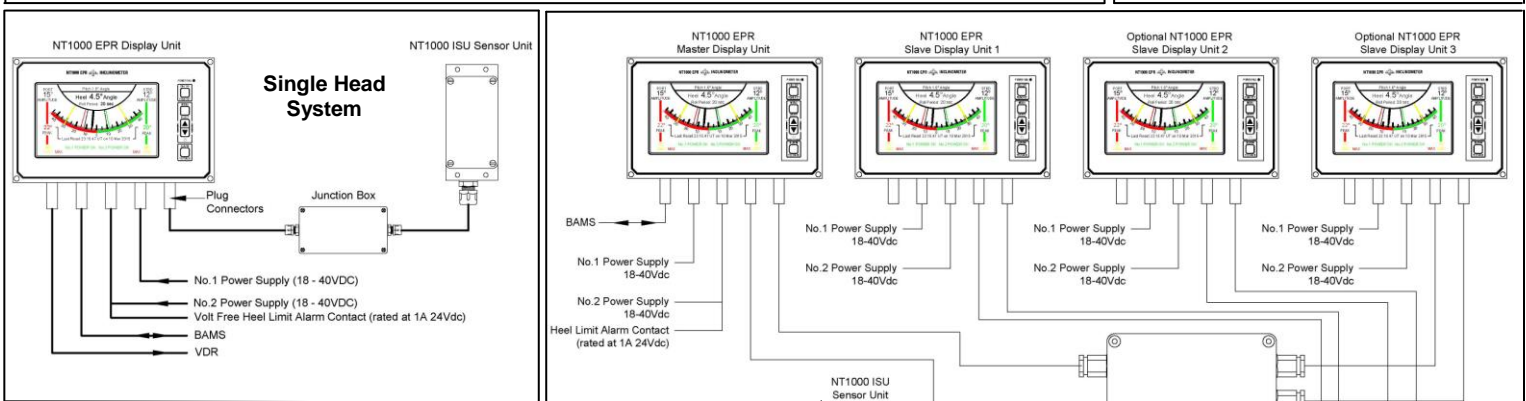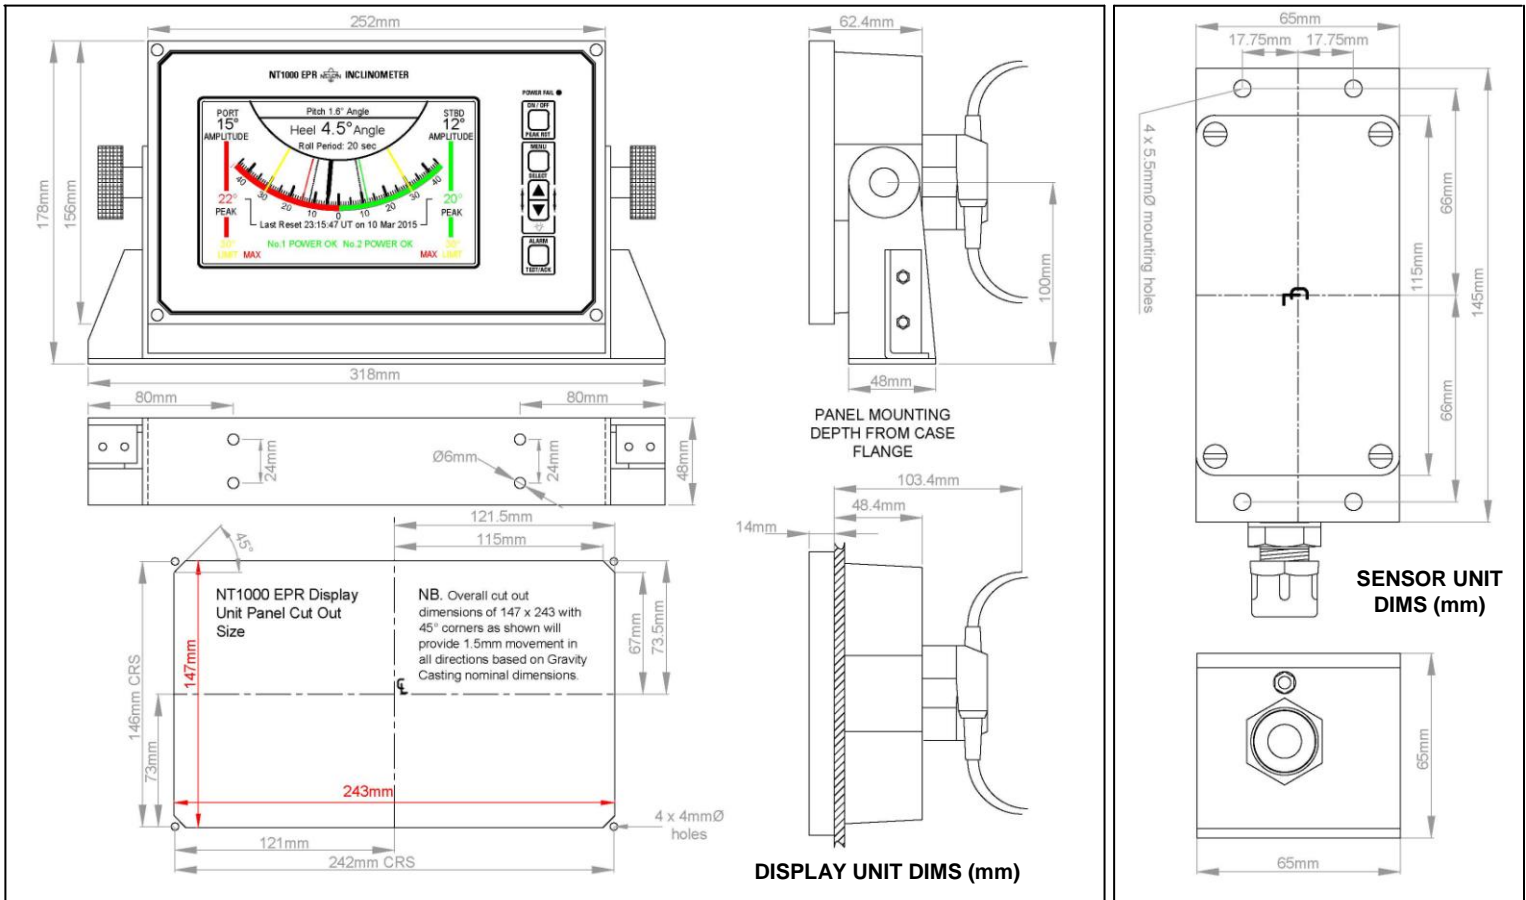

| POWER SUPPLY | |
|-------------------|----------|
| Main Power | 18-40Vdc |
| Backup Power | 18-40Vdc |
| Power consumption | 12W max |

| MEASUREMENT ACCURACY | |
|-----------------------|--------------------------------------|
| Pitch / Roll Accuracy | ±1° or 5% whichever is greater |
| Roll period | 4 - 40seconds |
| Roll period accuracy | 1 second or 5% whichever is greater. |

| BAMS SERIAL DATA INTERFACE | |
|----------------------------|-------------------------------|
| IEC61162/1 OR IEC61162/2 | 4800 Baud |
| | 38400 Baud |
| Output sentences | \$IIALF \$IIALC \$IIHBT |
| Input sentences | \$IIACN |

| VDR SERIAL DATA INTERFACE | |
|---------------------------|--------------------|
| IEC61162/1 OR IEC61162/2 | 4800 Baud |
| | 38400 Baud |
| Output sentences | \$IIHRM \$IIHBT |

| MECHANICAL DATA | CONTROL UNIT | SENSOR UNIT |
|-----------------|--------------|-------------|
| Width | 252mm | 110mm |
| Height | 156mm | 65mm |
| Depth | 50mm | 55mm |
| Weight | 2.2kg | 0.3kg |



NAVITRON SYSTEMS LTD

NAVITRON SYSTEMS LTD (Registered in England No. 2607869)
 17 The Tanneries, Brockhampton Lane, Havant, Hampshire PO9 1JB
 TEL: (UK) 023 9249 8740 FAX: (UK) 023 9249 8783
 (INT) +44 23 9249 8740 (INT) +44 23 9249 8783
 E-mail: sales@navitron.co.uk Web: www.navitron.co.uk