








MK2000S-W/ MK2002S-W

MAGNETIC COMPASS OUTFIT

For vessels over 150GRT, fishing vessels over 35m and naval vessels.

Suitable for use with Lilley & Gillie (and other) Transmitting Magnetic Compass (TMC) equipment to operate repeaters, off-course alarms and outputs to navigation equipment including gyro back up.



P1920 Steering Repeater (Option)





Type approved to the European Marine Equipment Directive (MED), Chinese Classification Society and other Maritime Authorities

NSN 660-599-226-1091

Design Features

- Reduced shipyard installation work
- Improved watertightness around deck/periscope area
- Simple periscope assembly installation and removal
- · Low weight
- Low voltage lighting within the binnacle
- Mounting arrangements for various TMC sensors





Instrumental in Marine Navigation

Sestrel Mk2000S-W and Mk2002S-W Magnetic Compass Systems



The compass outfit is available in Reflector, Non-Reflector and Naval (DG Correction) versions with the following features.

Material Reinforced glassfibre binnacle.

Correction A full set of compensating magnets for

B, C and H plus adequate quadrantal

corrector and flinders plates.

Fixings Rubber base gasket and four S/S M20x90

mounting bolts, nuts and washers.

Lighting Two 24vdc 15w lamps and one spare fitted

within the binnacle. Control of lamps, dimmer and power supply by the FW9862 Control Unit. A two position dimmer switch is also fitted within the binnacle

for local control.


Compass Lilley & Gillie 'SR4', Class A,

175mm Reflector Card.

Weights (Mk2000S only)

Reflector Binnacle 35kg
Non-Reflector Binnacle 30kg
'SR4' Compass 6.5kg
Lighting Control Unit 0.62kg
FW9011 Azimuth in box 1.45kg

Colour White

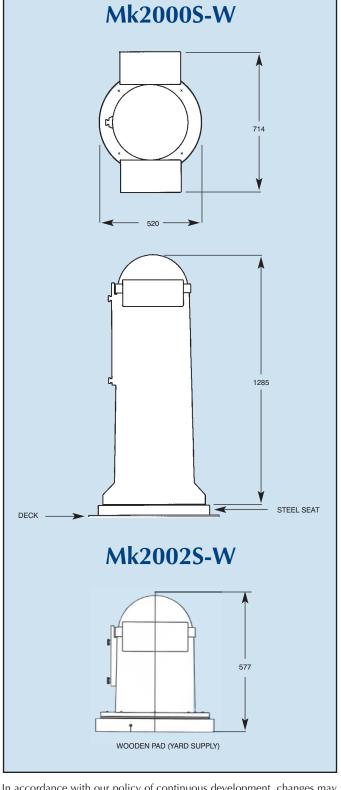

In accordance with our policy of continuous development, changes may be made from time to time without prior notice.









